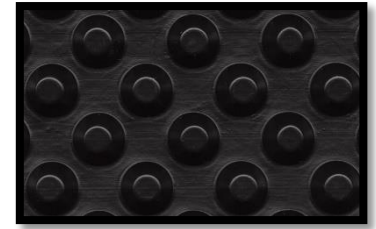


**NEVOBAHN® - STANDARD**

Resin:	High-Density Polyethylen (HDPE)	<b>CE</b>
Colour:	black	
Sheet thickness:	approx. 0,40 mm	
Dimension / Max. section width:	0,50m x 20 lfm to 4,00m x 20 lfm	
Area weight to DIN EN 12127	400 g/m <sup>2</sup>	
Dimple height:	8 mm	
Dimple spacing:	approx. 1.860 pro m <sup>2</sup>	
Air gab (between dimpled):	approx. 5,3 l/m <sup>2</sup>	
Water drainage capacity to EN ISO 12958, i=1	approx. 2,5 l/s/m	
Compressive strength to DIN EN ISO 25619-2	approx. 170 kN/m <sup>2</sup> (17 t/m <sup>2</sup> )	
Max. Compressive strength based on DIN EN ISO 25619-2	approx. 400kN/m <sup>2</sup> (40t/m <sup>2</sup> )	
Service temperature range:	-40°C to +80°C	
Physiological properties:	Safe for drinking water, chemical-resistant, root-proof, rot-proof and resistant to fungal and bacterial attack	

**INFORMATION:**

The information given is the best that Nevoga researched and prepared at this time. The instruction sheets are recommendations. Correct use is the responsibility of the user. Nevoga does not guarantee the accuracy and completeness of the information. All rights for changes, mistakes, sentence and printing errors reserved.